

VegaLux 300®

High-Performance **StudioLED** Fresnel Motorized Zoom



High Performance
High CRI/TLCI indexes >93
80%-120% more light!

High performance LED fresnels with
a variable beam of pure white light.



Tungsten CCT

Daylight CCT

BiColor Tunable CCT

VegaLux 300® is a motorized zoom DMX tunable neutral white light LED Fresnel that adds now two new models in dedicated versions of Tungsten and Daylight Color Temperatures.



www.fluotec.net
info@fluotec.net



FLUOTEC
...WE LIGHT!

Motorized zoom DMX tunable neutral white light LED Fresnel that adds now two new models in dedicated versions of Tungsten and Daylight Color Temperatures.

Model	VegaLux 300® Tungsten	VegaLux 300® Daylight	VegaLux 300® Tunable
Code	G6LED177	G6LED178	G6LED126
Operation	90-240V - 50/60Hz	90-240V - 50/60Hz	90 - 240V - 50/60Hz
Weight lb/kg	16.5/7.5	16.5/7.5	26.23/11.9
Electrical draw	1.64A (197W) @120VAC	1.64A (197W) @120VAC	2.81A (338W) @120V
Color temperature	3100K	5700K	3000K - 5800K
CRI	>93	>93	>90
Remote dimming control	Via DMX 0% - 100%	Via DMX 0% - 100%	Via DMX 0% - 100%
Local dimming control	Digital Display 0% - 100%	Digital Display 0% - 100%	Digital Display 0% - 100%
Zoom control	Motorized Local & DMX from 13° - 50°	Motorized Local & DMX from 13° - 50°	Motorized Local & DMX from 15° - 50°

Technical specifications

- The **VegaLux 300 Tunable** has a 10" Plastic Microprism Fresnel Lens
- The **VegaLux 300 Tungsten and Daylight** has a 10" Premium Glass Fresnel Lens
- Local and DMX Digital Dimmer 0%- 100%
- 50,000 hours long Life LED
- HALODIM® Stepless CCT & Dimming Technology
- Quiet operation

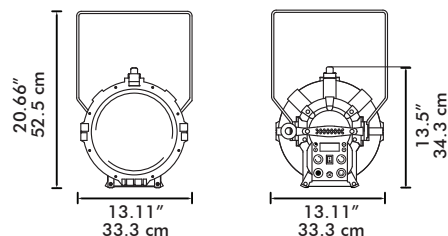


Photometric Data


Distance
1.83m (6.00ft) 2.74m (9.00ft) 3.66m (12.00ft)

Illuminance E Foot-Candles/lux

VegaLux 300® Neutral White

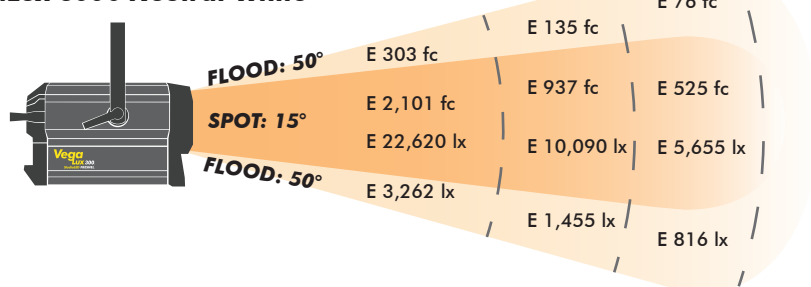


VegaLux 300® Daylight

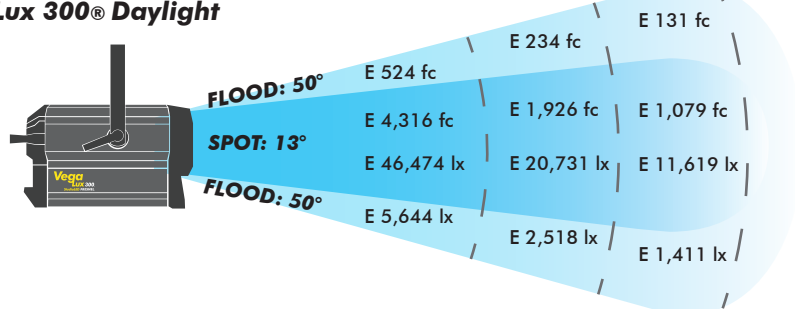


VegaLux 300® Tungsten



Included accessories



Barndoor-8 Blades
G6LED127




Filter Holder
G6LED128



16 ft AC Cable POWERCON
Edison U-Ground connector
G6CNT154



Stand Fitting 5/8"
G6FLT057



Safety Cable
G6FLT059



C-Clamp
G6FLT262